
Steel

rev. 21-07-2026



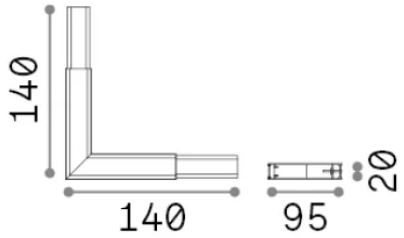

General info

Technical

Ean	8021696241999
Item	STEEL SP D20 PROFILO ANGOLARE WIDE 3000K BIANCO
Installation	
Warranty	5 years
Gross weight	0.26 kg
Volume	0.00256 m^3

Technical info

Net weight	0.26 kg
Insulation class	III
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Dimmer	1, CC regulation
Accessory type	Optional
Power output	36 V DC
Power supply	Included in LINUS SP/AP

Source info

Integrated source	Integrated LED module
Repleaceable source	No
Power	5,5 W
Emission	Direct
Max consuption	max 5,5 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°c)	50000 h
CRI	> 90
SDCM	3
Light beam	104°
Light beam flux	560 lm
Useful light flux	320 lm
Photobiological risk	1
Standby power	< 0.50 W

IDEAL LUX s.r.l.
Via Taglio Destro, 32, 30035 Mirano (Venezia)
Tel +39 041 5790500 | **Fax** +39 041 8872349 | **E-mail** info@ideal-lux.com
www.ideal-lux.com