

## General info


## Technical - Recessed lights



|              |                        |
|--------------|------------------------|
| Ean          | 8021696307756          |
| Item         | QUARK FI 5.0W 3000K BI |
| Installation | Recessed lights        |
| Warranty     | 5 years                |
| Gross weight | 0.19 kg                |
| Volume       | 0.000468 m³            |

## Technical info

|                       |                                                                                |
|-----------------------|--------------------------------------------------------------------------------|
| Net weight            | 0.14 kg                                                                        |
| Insulation class      | II                                                                             |
| Protection index      | IP20                                                                           |
| Compliance            | CE                                                                             |
| Operating temperature | 0° ~ +40 °C [DO NOT COVER]                                                     |
| Dimmer                | Non-dimmable, On-Off                                                           |
| Power output          | 220-240 V AC 50/60 Hz                                                          |
| Power supply          | Separate, included<br>Replaceable (by qualified operators only),<br>electronic |

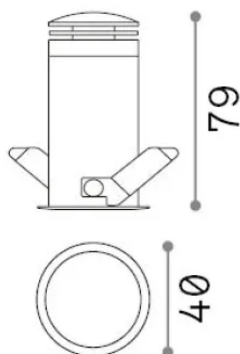

## Source info

|                        |                                           |
|------------------------|-------------------------------------------|
| Integrated source      | Integrated LED module                     |
| Repleaceable source    | Replaceable (by qualified operators only) |
| Power                  | 5 W                                       |
| Emission               | Direct                                    |
| Max consupcion         | max 5 W                                   |
| Features LED           | LED SMD BRIDGELUX                         |
| CCT LED                | 3000 K                                    |
| Duration LED (t. 25°C) | 50000 h                                   |
| CRI                    | > 90                                      |
| SDCM                   | 3                                         |
| Light beam             | 30°                                       |
| UGR Maximum            | < 19                                      |
| Light beam flux        | 510 lm                                    |
| Useful light flux      | 230 lm                                    |
| Photobiological risk   | 2                                         |