
Umile

rev. 22-07-2026



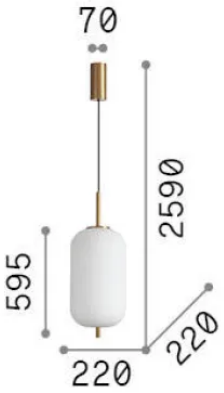

General info

Indoor - Suspensions

Ean	8021696314952
Item	UMILE-2 SP1
Installation	Suspensions
Warranty	5 years
Gross weight	3.2 kg
Volume	0.052326 m^3

Technical info

Net weight	2.5 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Dimmer	Non-dimmable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included Replaceable (by qualified operators only), electronic

Source info

Integrated source	Integrated LED module
Repleaceable source	No
Power	LED 20 W
Emission	Diffuse
Max consuption	max 20 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°c)	30000 h
CRI	> 90
SDCM	3
Light beam flux	2000 lm
Useful light flux	1420 lm
Photobiological risk	EXEMPT
Bulb included	1
Recommended bulb	LED INTEGRATO 2000Lm 3000K

IDEAL LUX s.r.l.
Via Taglio Destro, 32, 30035 Mirano (Venezia)
Tel +39 041 5790500 | **Fax** +39 041 8872349 | **E-mail** info@ideal-lux.com
www.ideal-lux.com