

## General info


## Technical - Recessed lights



|              |                                 |
|--------------|---------------------------------|
| Ean          | 8021696341422                   |
| Item         | GAME TRIM ROUND 20W 3000K BI OR |
| Installation | Recessed lights                 |
| Warranty     | 5 years                         |
| Gross weight | 0.76 kg                         |
| Volume       | 0.002451 m³                     |

## Technical info

|                          |                                                                                |
|--------------------------|--------------------------------------------------------------------------------|
| Net weight               | 0.65 kg                                                                        |
| Insulation class         | II                                                                             |
| Protection index         | IP20                                                                           |
| Compliance               | CE                                                                             |
| Operating temperature    | 0° ~ +40 °C [DO NOT COVER]                                                     |
| Dimmer                   | Non-dimmable, On-Off                                                           |
| Power output             | 220-240 V AC 50/60 Hz                                                          |
| Power supply             | Separate, included<br>Replaceable (by qualified operators only),<br>electronic |
| Load resistance          | IK06                                                                           |
| Front protection index   | IP40                                                                           |
| Accessories not included | Dimmable driver                                                                |

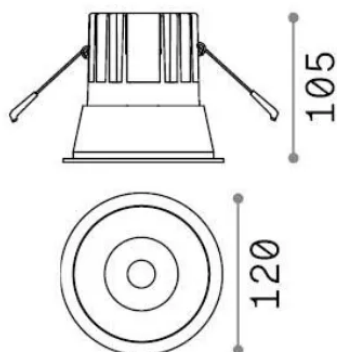

## Source info

|                        |                                           |
|------------------------|-------------------------------------------|
| Integrated source      | Integrated LED module                     |
| Repleaceable source    | Replaceable (by qualified operators only) |
| Power                  | 20 W                                      |
| Emission               | Direct                                    |
| Max consupction        | max 20 W                                  |
| Features LED           | LED COB CREE                              |
| CCT LED                | 3000 K                                    |
| Duration LED (t. 25°C) | 50000 h                                   |
| CRI                    | > 90                                      |
| SDCM                   | 3                                         |
| Light beam             | 27°                                       |
| UGR Maximum            | < 19                                      |
| Light beam flux        | 2250 lm                                   |
| Useful light flux      | 1680 lm                                   |
| Photobiological risk   | 1                                         |