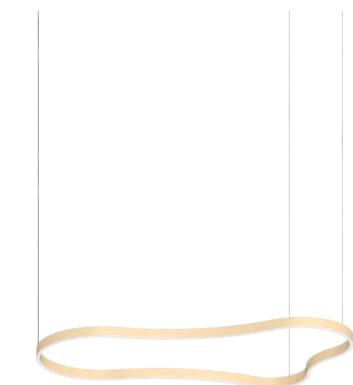


## General info

### Indoor - Suspensions

|              |                |
|--------------|----------------|
| Ean          | 8021696345284  |
| Item         | WAVES-3 SP ORO |
| Installation | Suspensions    |
| Warranty     | 5 years        |
| Gross weight | 8.9 kg         |
| Volume       | 0.17898 m³     |

## Technical info

|                       |                                                                                |
|-----------------------|--------------------------------------------------------------------------------|
| Net weight            | 4.3 kg                                                                         |
| Insulation class      | II                                                                             |
| Protection index      | IP20                                                                           |
| Compliance            | CE                                                                             |
| Operating temperature | 0° ~ +40 °C                                                                    |
| Dimmer                | Non-dimmable, On-Off                                                           |
| Power output          | 220-240 V AC 50/60 Hz                                                          |
| Power supply          | In-built, included<br>Replaceable (by qualified operators only),<br>electronic |

## Source info

|                        |                            |
|------------------------|----------------------------|
| Integrated source      | Integrated LED module      |
| Replaceable source     | No                         |
| Power                  | LED 54 W                   |
| Emission               | Direct                     |
| Max consumption        | max 54 W                   |
| Features LED           | LED SMD                    |
| CCT LED                | 3000 K                     |
| Duration LED (t. 25°C) | 30000 h                    |
| CRI                    | > 90                       |
| SDCM                   | 3                          |
| Light beam flux        | 5500 lm                    |
| Useful light flux      | 2930 lm                    |
| Photobiological risk   | 1                          |
| Bulb included          | 1                          |
| Recommended bulb       | LED INTEGRATO 5500Lm 3000K |