


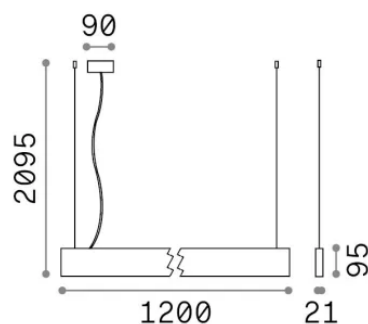

## General info

### Technical - Systems

|              |                                                  |
|--------------|--------------------------------------------------|
| Ean          | 8021696368863                                    |
| Item         | STEEL SP2 D20 BI-EMISSION ACCENT<br>4000K BIANCO |
| Installation | Systems                                          |
| Warranty     | 5 years                                          |
| Gross weight | 2.3 kg                                           |
| Volume       | 0.013132 m <sup>3</sup>                          |

## Technical info

|                       |                                      |
|-----------------------|--------------------------------------|
| Net weight            | 1.85 kg                              |
| Insulation class      | I                                    |
| Protection index      | IP20                                 |
| Compliance            | CE                                   |
| Operating temperature | 0° ~ +40 °C                          |
| Dimmer                | 1, 1-10V                             |
| Power output          | 100-240 V AC 50/60 Hz                |
| Power supply          | In-built, included<br>NO, electronic |

## Source info

|                        |                       |
|------------------------|-----------------------|
| Integrated source      | Integrated LED module |
| Replaceable source     | No                    |
| Power                  | 38 W                  |
| Emission               | Direct + Indirect     |
| Max consumption        | max 38 W              |
| Features LED           | LED SMD               |
| CCT LED                | 4000 K                |
| Duration LED (t. 25°C) | 50000 h               |
| CRI                    | > 90                  |
| SDCM                   | 3                     |
| Light beam             | 44+104°               |
| UGR Maximum            | < 19                  |
| Light beam flux        | 5150 lm               |
| Useful light flux      | 3270 lm               |
| Photobiological risk   | 1                     |
| Standby power          | < 0.50 W              |